

### VMTC-32C

#### Customizable Industrial HD Touch Screen Monitor



- 32" Color Capacitive Touch Screen Monitor
- Full HD Resolution 1920 x 1080 (1180p/60)
- Wide Viewing Angle (178°)
- Cinema Scope Mode: Does Not Distort 4:3 Image on 16:9 Screen
- Video Inputs: VGA and DVI
- LED Backlights
- 12 VDC Output
- Rugged Powder-Coated Steel Enclosure
- Can Be Customized to Meet Your Needs
- 3 Year Warranty

The VMTC-32C HD touch screen monitor is ideal for industrial, commercial, A/V, broadcast, and medical applications. It provides crystal-clear HD images, picture-in-picture, and more. The capacitive touch screen is quickly and accurately activated by an exposed human finger. It offers great optical clarity, is scratch-resistant, very durable and is unaffected by dirt, grease or moisture on the surface. The VMTC-32C is available in a standard enclosure, and open frame or panel mount configurations. An extensive list of available OEM options enables you to customize the VMTC-32C to your specific needs. Visit [www.TRU-VuMonitors.com](http://www.TRU-VuMonitors.com) for more details.

All TRU-Vu industrial LCD monitors are specifically designed for use in demanding industrial, commercial, medical, and A/V applications. Every TRU-Vu monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability.


#### Specifications

LCD Panel	32" TFT Color LCD
Display Resolution	1920 x 1080 (Full HD) 1080p/60
Viewing Area	27.48" (W) x 15.43" (H)
Pixel Pitch	0.364mm x 0.364mm
Display Colors	16.7 Million
Aspect Ratio	16:9
Brightness	350 nits
Contrast Ratio	3,000:1
Viewing Angle	178° (H) x 178° (V)
Response Time	6.5 msec (gray to gray)
Control	OSD (On-Screen Display) via Rear Panel Pushbuttons or Remote Control
Video Inputs	VGA, DVI
Power Requirement	24 VDC / 90-240 VAC
Power Consumption	100 Watts
Enclosure	Black Powder-Coated Steel
Mounting	Mounting Stand (shown) Included; VESA Mounting 100 x 100mm, 100 x 200mm, 200 x 200mm
Operating Temperature	32° to 104° F / 0° to 40° C
Humidity	10-90% RH
Shock	50 G (11 msec, 1/2 sine)
Vibration	1.5 G RMS 10-300Hz
Approvals	UL/cUL, FCC, CE, RoHS
Dimensions	30" (W) x 18.5" (H) x 3.3" (D) / 762 (W) X 469.9 (H) X 83.82 (D) mm
Weight	32 lbs. / 14.5 kg

## VMTC-32C

### 32" Customizable HD Touch Screen Monitor

#### Dimensions:

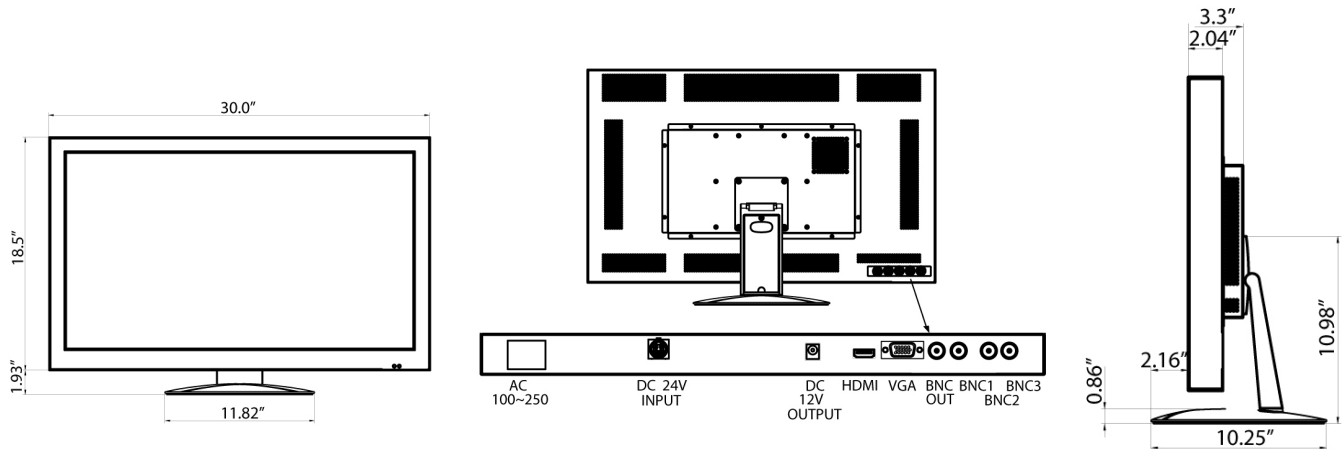

#### Standard Accessories:

- AC Power Cord
- Tabletop Stand
- DVI Cable
- Remote Control
- 24 VDC Adapter Cable

#### Available Options:

- Internal Speakers
- Protective/Anti-Reflective Glass Screen
- Panel Mount
- Open-Frame Configuration
- Private Label on Front Bezel and Rear Label
- Other Customer – Specific Modifications