

Manta

G-032



- Versatile VGA camera
- Power over Ethernet option
- Angled-head and board level variants
- Video-iris lens control

Description

VGA machine vision camera with GigE Vision interface

Manta G-032 is a value packed GigE Vision camera with VGA resolution. Manta G-032 is offered in both monochrome and color models. It incorporates the high quality Type 1/3 (6.0 mm diagonal) Sony ICX424 CCD sensor. At full resolution, this camera runs 80.7 frames per second. With a smaller region of interest, higher frame rates are possible.

Manta is one of Allied Vision's versatile GigE Vision cameras with a wide range of features. Particular highlights are the three look-up tables, sophisticated color correction capabilities, a robust metal housing, and many modular options. By default monochrome models ship with protection glass B 270 (ASG) and color models ship with an IRC Hoya C-5000 IR cut filter.

Benefits and features:

- Monochrome (G-032B) and color (G-032C) models
- GigE Vision interface with Power over Ethernet option
- Screw mount RJ45 Ethernet connector for secure operation in industrial environments
- Supports cable lengths up to 100 meters (CAT-5e or CAT-6)
- Comprehensive I/O functionality for simplified system integration
- Popular C-Mount lens mount
- Easy camera mounting via standard M3 threads on top and bottom of housing or optional tripod adapter
- Easy software integration with Allied Vision's [Vimba SDK](#) and compatibility to the most popular [third party image-processing libraries](#).

Options:


- Available with Power over Ethernet (PoE) compliant interface
- Available with CS-Mount or M12-Mount adapter

- Available with Protection glass B 270 (ASG), IRC type Jenofilt 217 (IR cut filter), IRC Hoya C-5000 (IR cut filter), IRP RG715 (IR pass filter), IRP RG830 (IR pass filter)
- Available with various angled-head housings or board level version
- Available with white medical design

See the [Modular Concept](#) for lens mount, housing variants, optical filters, case design, and other modular options. See the [Customization and OEM Solutions](#) webpage for additional options.

Specifications

| Manta | G-032 |
|---|---|
| Interface | IEEE 802.3 1000BASE-T, IEEE 802.3af (PoE) optional |
| Resolution | 656 (H) × 492 (V) |
| Sensor | Sony ICX424 |
| Sensor type | CCD Progressive |
| Sensor size | Type 1/3 |
| Pixel size | 7.4 μm × 7.4 μm |
| Lens mount (default) | C-Mount |
| Max. frame rate at full resolution | 80.7 fps |
| ADC | 12 bit |
| Image buffer (RAM) | 32 MByte |
| Output | |
| Bit depth | 8/12 bit |
| Monochrome pixel formats | Mono8, Mono12, Mono12Packed |
| YUV color pixel formats | YUV411Packed, YUV422Packed, YUV444Packed |
| RGB color pixel formats | RGB8Packed, BGR8Packed, RGBA8Packed, BGRA8Packed |
| Raw pixel formats | BayerRG8, BayerRG12Packed, BayerRG12 |
| General purpose inputs/outputs (GPIOs) | |
| Opto-isolated I/Os | 2 inputs, 2 outputs |
| RS232 | 1 |
| Operating conditions/dimensions | |
| Operating temperature | +5 °C to +45 °C ambient (without condensation) |
| Power requirements (DC) | 8 to 30 VDC AUX or 802.3af PoE |
| Power consumption | 3.6 W at 12 VDC; 4.2 W PoE |
| Mass | 200 g; 210 g (PoE) |
| Body dimensions (L × W × H in mm) | 86.4 × 44 × 29 (including connectors) |
| Regulations | CE: 2014/30/EU (EMC), 2011/65/EU, including amendment 2015/863/EU (RoHS); FCC Class B; CAN ICES-003 |

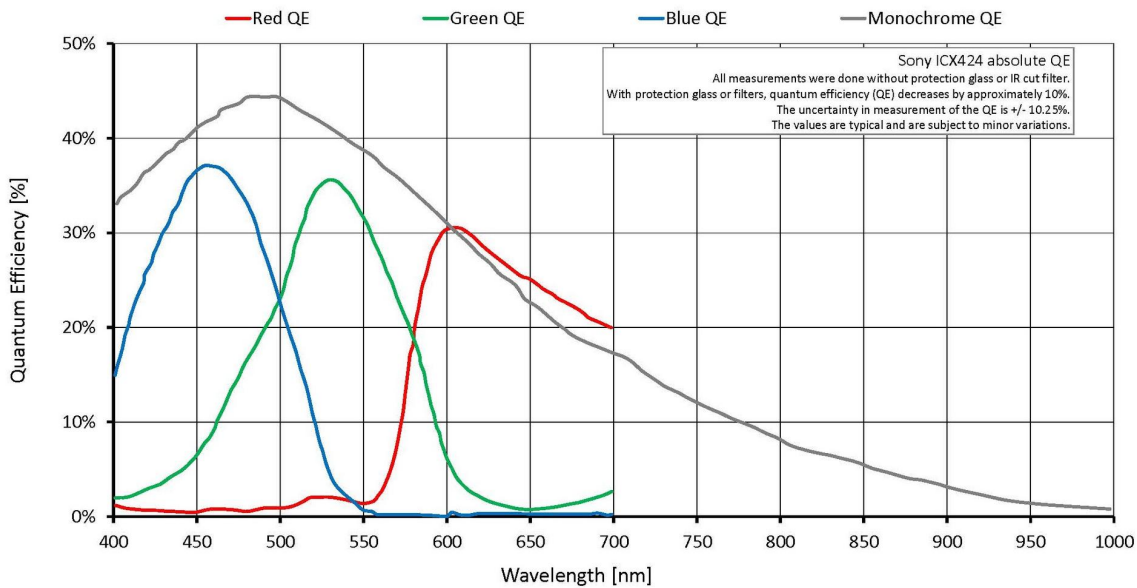

Features



Image optimization features:

- Auto gain (manual gain control: 0 to 36 dB; 1 dB increments)
- Auto exposure (26 μ s to 60 s; 1 μ s increments)
- Auto white balance (G-032C only)
- Binning (Sum)
- Black level (offset)
- Color correction, hue, saturation (G-032C only)
- Gamma correction
- Three look-up tables (LUTs)
- Region of interest (ROI), separate ROI for auto features

Camera control features:

- Auto-iris (video type)
- Event channel
- Image chunk data
- Storable user sets
- StreamBytesPerSecond (bandwidth control)
- Stream hold
- Sync out modes: Trigger ready, input, exposing, readout, imaging, strobe, GPO

Technical drawing

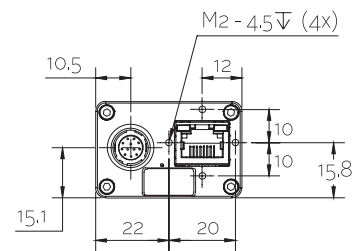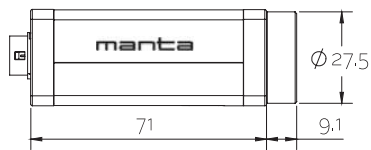



Applications

Manta G-032 is ideal for a wide range of applications including:

- Semiconductor inspection
- Food inspection
- Printing marks control
- Pharmaceutical inspection
- Ophthalmology
- Machine vision
- Intelligent traffic solutions (ITS)