

## S5B00MG000E

- Movidius Myraid 2 VPU
- 512MB RAM & 512MB NAND
- Conform to CE, FCC, RoHS certifications
- Software trigger/Hardware trigger/Free run mode
- Embedded algorithm: code-reading
- Ethernet industrial interface, max 100m transmission




### Specification

Model	Sensor	Sensor type	Shutter	Resolution	Frame rate ( fps )	Bit depth	Interface	Mono/Color	Pixel size ( μ m )	Sensor size
S5B00MG000E	IMX183	CMOS	Rolling	5472*3600	10	10	GigE	Mono	2.4*2.4	1 "

Model	S5B00MG000E
Effective Pixels	20MP
Processor	Movidius Myraid 2 VPU
SNR	>38dB
Dynamic Range	66dB
Interface	M12 8-pin Ethernet, M12 12-pin GPIO
GPIO	12 pins I/O connector, RS232/485(optional): 1ch input, 1ch output
Memory	512MB LPDDR3 and 512MB NAND
Exposure Time	32μs~1s
Trigger Mode	Software trigger/Hardware trigger/Free run mode
SDK	SVStudio
Dimensions	68mm x 55mm x 28mm( not including lens mount and height of connectors)
LED indicator	5 LED indicators represent system, network, trigger and 2 sets of user-defined configurations
Lens mount	Support C-mount, M12 mount and optional built-in illumination
Power Supply	Support 8~26V DC wide range power supply
IP Rating	IP67 with lens cover
Temperature	Storage temperature: -30° C~ + 80° C; Operation temperature: -20° C~+50° C


## Spectrogram

### S5B00MG000E

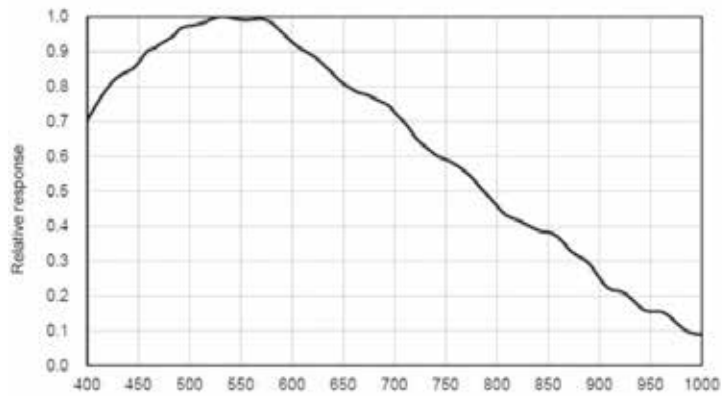


Quantum Efficiency Curve for Mono Sensor

## Dimensions

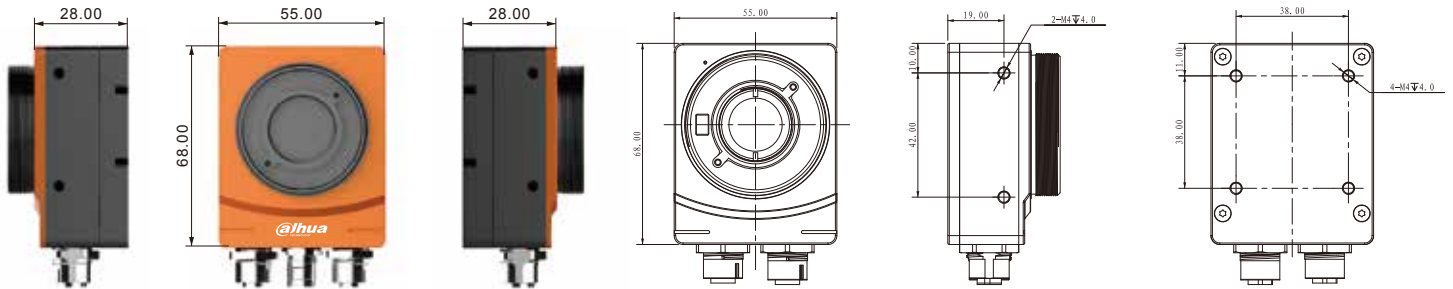

## IO Interface Instruction

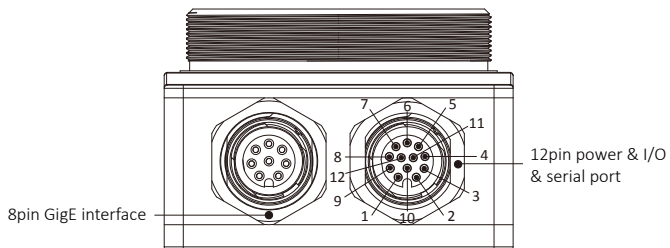

Pin	Signal	Description
1	OPTO_IN1	Opto-isolated input 1
2	OPTO_IN2	Opto-isolated input 2
3	OPTO_OUT1	Opto-isolated output 1
4	OPTO_OUT2	Opto-isolated output 2
5	RXD\B(-)	Serial port input
6	OPTO_IN_GND	Opto-isolated in ground
7	POWER	DC 8V-24V input
8	GND	Power ground
9	OPTO_OUT_GND	Opto-isolated out ground
10	OPTO_IN0	Opto-isolated input 0
11	OPTO_OUT0	Opto-isolated output 0
12	TXD\A(+)	Serial port output